



MAKE COMFORT YOUR LAUNDRY BUSINESS

2022 CATALOGUE

Professional Products

Outstanding performance and robust design

Professional Range

A wide and complete line of professional products, designed to provide excellent solutions that fully satisfy the needs of both the professional catering and hospital segments. The professional range includes products for hotels, garments, educations, laundry, washing and ironing.

Discover the whole range of Lavatrice
Professional Products

Flexibility

The **Lavatrice** range of professional appliances includes a wide variety of models, sizes, functions and advanced technologies, capable of satisfying every need and guaranteeing perfect results.




Superior Quality

All the professional products are built to last with a reliable structure and high-quality components, while meeting the highest safety standards according to **Lavatrice's** rigorous specifications.



Simplicity of Use

Lavatrice continuously invests in innovation to develop advanced and intuitive technologies, capable of offering excellent performances and maximum results with the minimum effort, by making professional life easier and more rewarding.

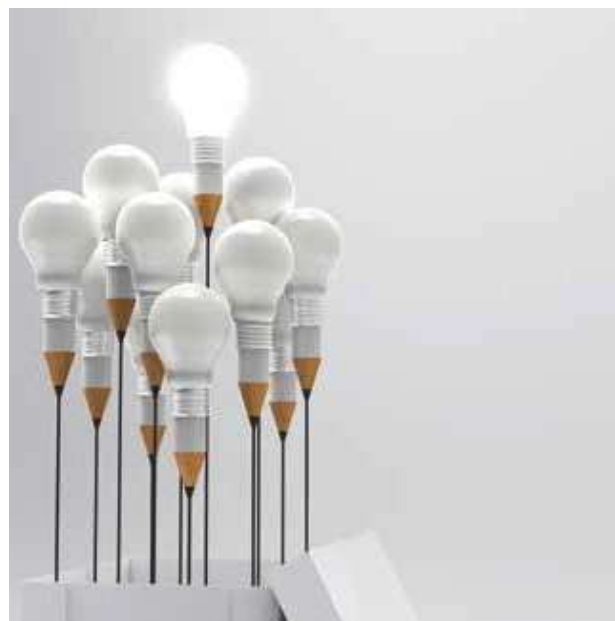




Professional Laundry

The LAVATRICE professional range of laundry appliances addresses the needs of small and large laundry facilities

The range consists of washing machines and tumble dryers, with either medium and large load capacity. They are designed for maximum reliability and durability, ensuring they can withstand the toughest environments.

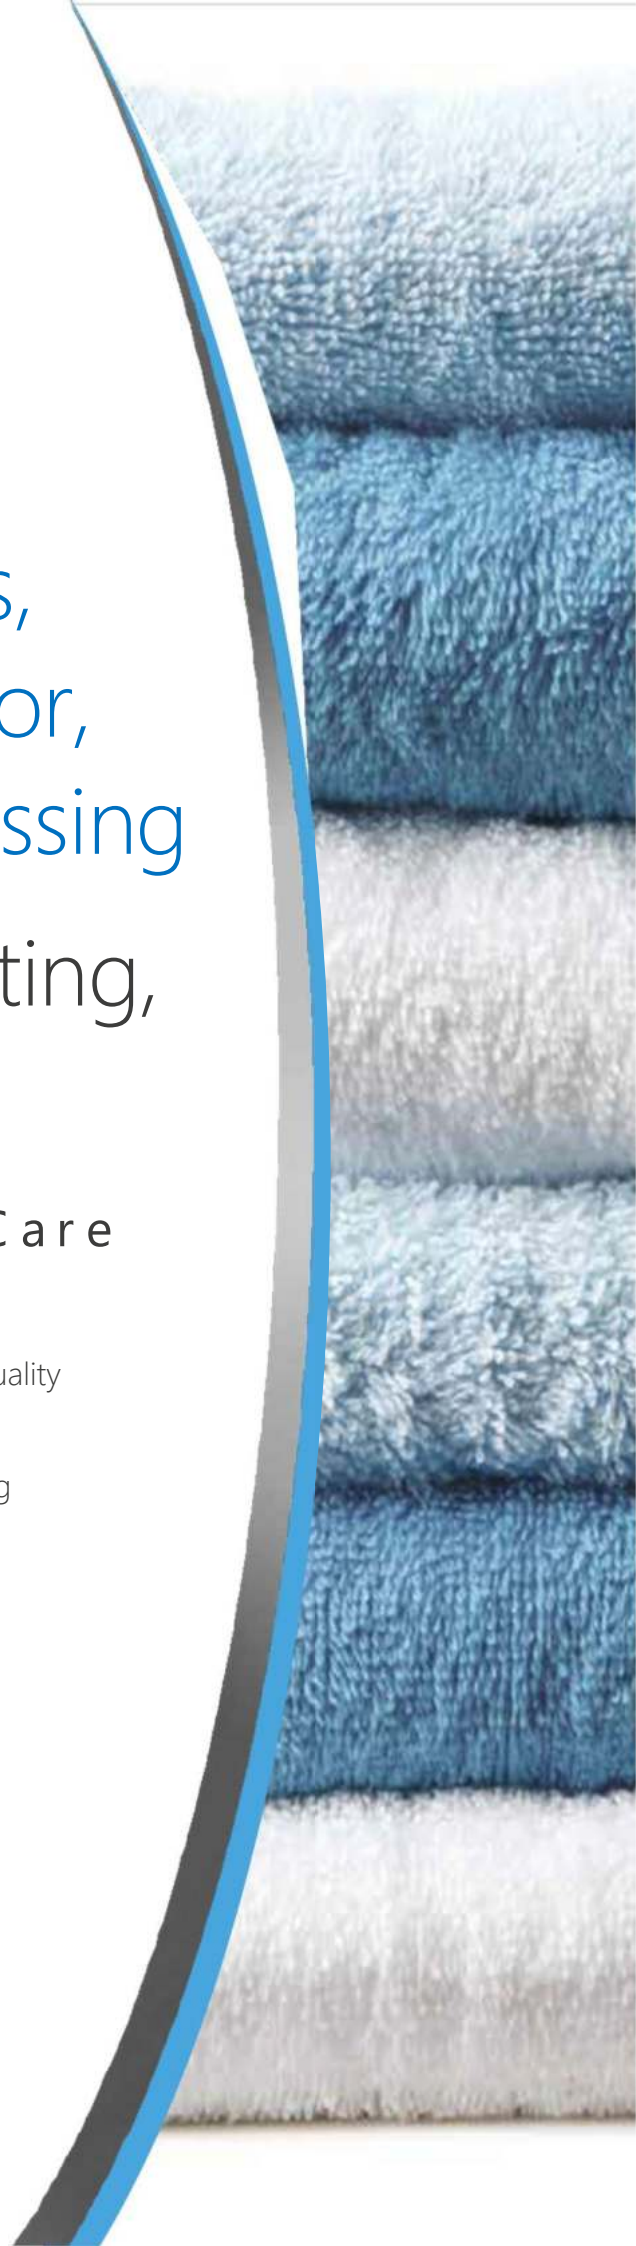

Professional Washers, Dryers, Hydro Extractor, Ironer and Steam Pressing

designed for long-lasting,
heavy-duty use

Explore the New Supreme Care Machines Collection

The perfect combination of functionality, reliability and top-quality results for making your working life easier.

Ideal for small businesses requiring laundry solutions requiring stronger and faster than standard domestic appliances.



WEB SERIES INDUSTRIAL BARRIER DOUBLE DOOR WASHER EXTRACTOR

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.





LOW VIBRATIONS, ABSOLUTE SILENCE

Thanks to Double Door Front loading, high spin, High efficiency, low consumption, low noise and safety, and used widely in the field, such as hospital laundry soft-mounted with Automatic Development Inverter



WE OFFER SUSTAINABLE SOLUTIONS IN LAUNDRY FOR CLEANROOMS

The full range of LAVATRICE barrier washers have been designed with durability, ergonomics and low maintenance in mind. They are compact and offer significant energy savings without ever forgetting that cleanliness is the most important point. They are therefore manufactured with special materials suitable for clean rooms, such as 316L stainless steel, electrically polished barrels and drums.



DETERGENT DOSING OPTION

Your ally with a green soul to ensure optimal washing and rinsing performances. It helps to dose the right amount of detergent for your laundry load, avoiding any waste or potential overdosing.



1. After you have selected the programme and pressed the "Start" button, the Dosing Aid supply with manual or dispenser pump (optional).



2. Start the programme by pressing "Start/Pause". The drum rotates to detect the laundry load, while the display shows an animation and then, after few seconds, indicates the recommended detergent amount in ml.




3. Pour the detergent quantity indicated on setting into the detergent dispenser and press "Start/Pause" to start the wash cycle.

HYGIENE CYCLE

A deep sanitising action that guarantees ultimate hygiene for the laundry.

It is the optimal washing programme for medium large businesses, such as laundry hospital, where cleanliness and hygiene are vital to prevent contamination and the spreading of germs.

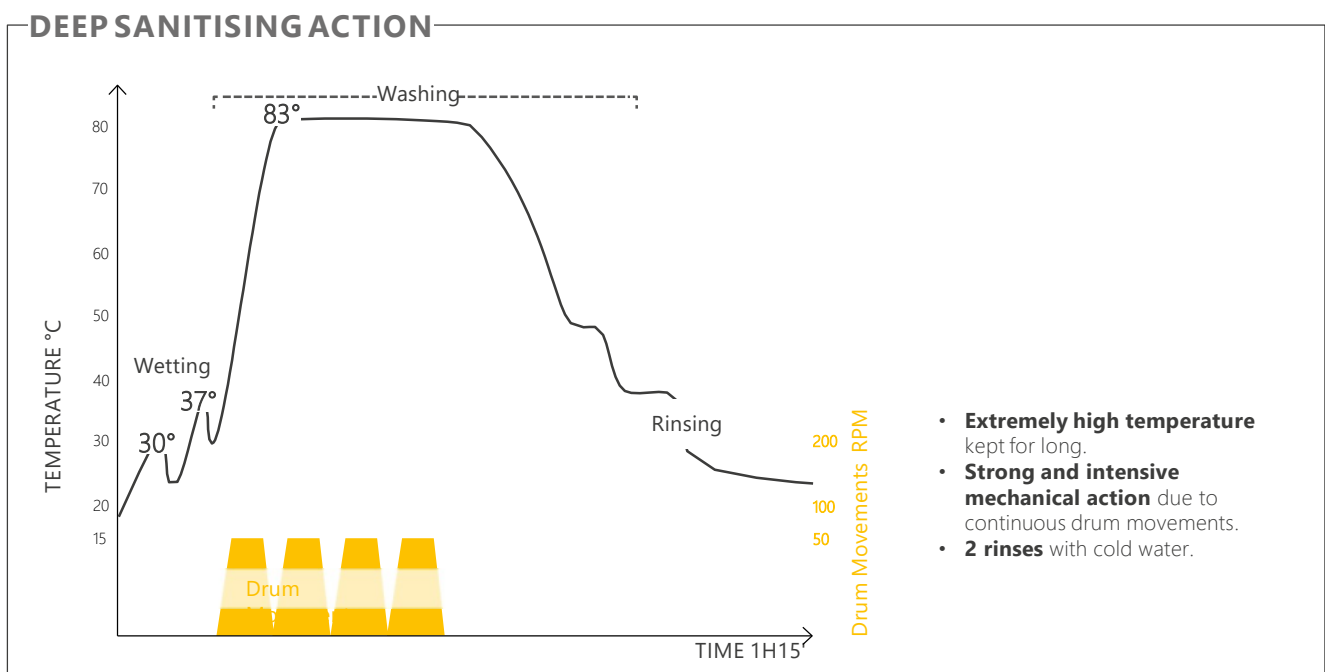

| Item | Model | WEB30 | WEB50 | WEB100 |
|--------------------|--------|------------|------------|-------------|
| Rated capacity Max | kg | 30 | 50 | 100 |
| Liner Size | mm | φ800 x 600 | φ900 x 800 | φ1220 x 853 |
| Power Supply | v/p/hz | 380/3/50 | 380/3/50 | 380/3/50 |
| Motor Power | kw | 4 | 5,5 | 7,5 |
| Electric Heating | kw | 20 | 30 | 48 |
| Washing Speed | rpm | 35 | 35 | 35 |
| High Spin Speed | rpm | 800 | 700 | 800 |
| Cold water pipe | inch | 1.5 | 1.5 | 2 |
| Hot water pipe | inch | 1.5 | 1.5 | 2 |
| Steam pipe | inch | 3/4 | 3/4 | 1 |
| Overall Size | | | | |
| Width | mm | 1380 | 1580 | 1810 |
| Depth | mm | 1380 | 1580 | 1950 |
| Height | mm | 1700 | 1900 | 2160 |
| Net Weight | kg | 1300 | 1700 | 3000 |

FEATURES

30 -100 Kg Washer Extractor for use in hospital laundry.

1. Double Door front loading, high spin, soft-mounted.
2. Full-Stainless steel drum and frame.
3. Steam or electrical heating.
4. Full-automatic washing and dewatering machine.
5. High efficiency, low consumption, low noise and safety, and used widely in the field, such as hospital laundry.
6. Its capacity is from 30kg to 100kg.
7. CE and ISO9001 certificates.



WEF SERIES INDUSTRIAL LARGE WASHER EXTRACTOR

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.





LOW VIBRATIONS, ABSOLUTE SILENCE

Washer Extractor Front loading, high spin, High efficiency, low consumption, low noise and safety, and used widely in the field, such as hospital or hotel laundry soft-mounted with Automatic Development Inverter



WE OFFER SUSTAINABLE SOLUTIONS IN LAUNDRY FOR CLEANROOMS

The full range of LAVATRICE washer extractor have been designed with durability, ergonomics and low maintenance in mind. They are compact and offer significant energy savings without ever forgetting that cleanliness is the most important point. They are therefore manufactured with special materials suitable for clean rooms, such as 316L stainless steel, electrically polished barrels and drums.



DETERGENT DOSING OPTION

Your ally with a green soul to ensure optimal washing and rinsing performances. It helps to dose the right amount of detergent for your laundry load, avoiding any waste or potential overdosing.



1. After you have selected the programme and pressed the "Start" button, the Dosing Aid supply with manual or dispenser pump (optional).



2. Start the programme by pressing "Start/Pause". The drum rotates to detect the laundry load, while the display shows an animation and then, after few seconds, indicates the recommended detergent amount in ml.



3. Pour the detergent quantity indicated on setting into the detergent dispenser and press "Start/Pause" to start the wash cycle.


HYGIENE CYCLE

A deep sanitising action that guarantees ultimate hygiene for the laundry.

It is the optimal washing programme for medium large businesses, such as laundry hospital, where cleanliness and hygiene are vital to prevent contamination and the spreading of germs.



DEEP SANITISING ACTION

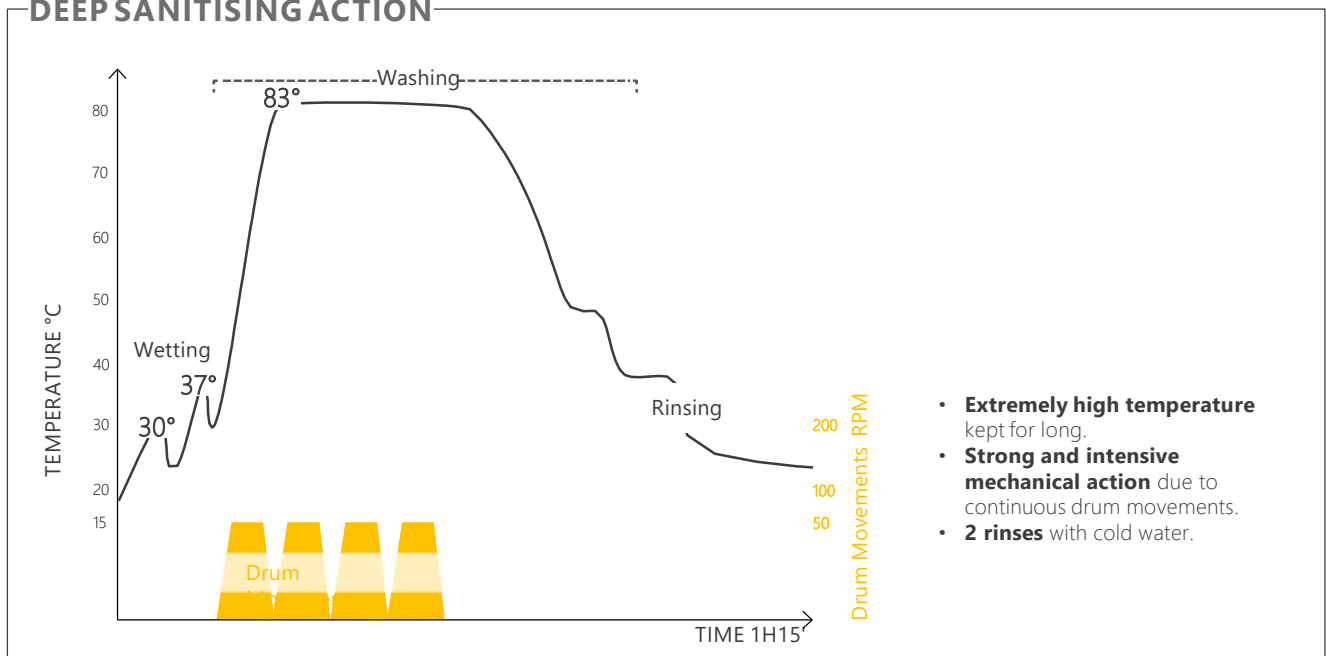

| Item | Model | WEF-20 | WEF-30 | WEF-50 | WEF-70 | WEF-100 | WEF-120 |
|----------------------|-------|----------------|----------------|----------------|----------------|----------------|----------------|
| Rated capacity | kg | 15-20 | 20-30 | 35-50 | 50-70 | 70-100 | 100-120 |
| Motor power | kw | 2.2 | 4.0 | 5.5 | 7.5 | 7.5 | 11 |
| Electrical power | kw | 12 | 24 | 32 | 36 | 48 | 72 |
| Drum diameter | mm | 700 | 900 | 1080 | 1080 | 1200 | 1300 |
| Drum deep | mm | 500 | 500 | 575 | 730 | 856 | 900 |
| Roller volume | litre | 300 | 300 | 504 | 708 | 920 | 1100 |
| Average speed | rpm | 85 | 80 | 75 | 70 | 65 | 60 |
| Washing speed | rpm | 45 | 36 | 35 | 33 | 31 | 29 |
| Middle dewater speed | rpm | 450 | 420 | 380 | 350 | 310 | 310 |
| High dewater speed | rpm | 890 | 800 | 760 | 700 | 700 | 600 |
| Steam pipe | inch | 3/4 | 1 | 1 | 1 | 1 | 1.5 |
| Cold water pipe | inch | 3/4 | 1.5 | 1.5 | 1.5 | 1.5 | 2 |
| Hot water pipe | inch | 3/4 | 1.5 | 1.5 | 1.5 | 1.5 | 2 |
| Drain valve | mm | φ 70 | φ 100 | φ 100 | φ 100 | φ 140 | φ 100 X 2 |
| Dimension (L×W×H) | mm | 1260×1050×1400 | 1460×1400×1635 | 1610×1550×1800 | 1760×1550×1800 | 1990×1690×2030 | 2195×1790×2100 |
| Net Weight | kg | 600 | 1250 | 1600 | 1800 | 2800 | 3150 |

FEATURES

20-120Kg Washer Extractor for use in hotel, hospital and laundry plant, and textile, jeans, denims, fabrics, wools and garment factory etc..

1. Front loading, high spin, soft-mounted.
2. Full-Stainless steel drum and frame.
3. Steam or electrical heating.
4. Full-automatic washing and dewatering machine.
5. High efficiency, low consumption, low noise and safety, and used widely in the field, such as hotel, restaurant, laundry house, water washing plant, and laundry equipment for garment, fabric, apparel.
6. Its capacity is from 10kg to 120kg.
7. CE and ISO9001 certificates.



LB SERIES BARRIER INFECTIOUS HORIZONTAL INDUSTRIAL WASHER NON EXTRACTOR Double Door (Front and Back)

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.





LOW VIBRATIONS, ABSOLUTE SILENCE

Thanks to Double Door Front loading, with optional high spin extracting, High efficiency, low consumption, low noise and safety, and used widely in the field, such as hospital laundry soft-mounted with Automatic Development Inverter



WE OFFER SUSTAINABLE SOLUTIONS IN LAUNDRY FOR CLEANROOMS

The full range of LAVATRICE barrier washers have been designed with durability, ergonomics and low maintenance in mind. They are compact and offer significant energy savings without ever forgetting that cleanliness is the most important point. They are therefore manufactured with special materials suitable for clean rooms, such as 304L stainless steel, electrically polished barrels and drums.



DETERGENT DOSING OPTION


Your ally with a green soul to ensure optimal washing and rinsing performances. It helps to dose the right amount of detergent for your laundry load, avoiding any waste or potential overdosing.



1. After you have selected the programme and pressed the "Start" button, the Dosing Aid supply with manual or dispenser pump (optional).



2. Run the program by pressing "Start". The drum rotates with the load of laundry, and then after a few seconds, enters the recommended amount of detergent in ml.



3. Pour the detergent quantity indicated on setting into the detergent dispenser and press "Start" to start the wash cycle.

| Item | Model | LB - 20S | LB - 30S | LB - 40S | LB - 50S | LB - 80S |
|-----------------|---------|----------|----------|----------|----------|----------|
| Drum capacity | kg | 20 | 30 | 40 | 50 | 80 |
| Drum diameter | mm | 500 | 600 | 700 | 800 | 1000 |
| Drum depth | mm | 800 | 800 | 800 | 900 | 1200 |
| Washing speed | rpm | 35 | 35 | 35 | 35 | 35 |
| Chlotes time | minutes | 30 - 40 | 30 - 40 | 30 - 40 | 30 - 40 | 30 - 40 |
| Drain pipe size | inch | 1.5 | 1.5 | 2.0 | 3 | 3 |
| Motor power | kw/hp | 1.5/2.0 | 2.2/3.0 | 3.0/4.0 | 4.0/5.5 | 5.5/7.5 |
| Power supply | v/p/hz | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 |
| Drum volume | liter | 200 | 300 | 400 | 500 | 800 |
| Width | mm | 1500 | 1500 | 1500 | 1700 | 1900 |
| Depth | mm | 1000 | 1000 | 1000 | 1100 | 1800 |
| Height | mm | 1300 | 1400 | 1500 | 1700 | 1800 |
| Weight | kg | 250 | 350 | 450 | 550 | 850 |

FEATURES

1. Stainless steel 304 inner and outer drums, protect fabrics from getting rusty.
2. Strong corrosion resistance.
3. Adopt famous brand motor & parts to ensure stable performance.
4. Analog control programs. temperature & washing time adjustable.
5. Seal makes no leakage of both ends of spindle.
6. Easy installation and maintenance. new generation, Suitable for washing various fabric and clothes.
7. Double door loading and unloading



LC SERIES HORIZONTAL INDUSTRIAL WASHER NON EXTRACTOR Single Door

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.





LOW VIBRATIONS, ABSOLUTE SILENCE

Single Door Washer Front loading, with optional high spin extracting, High efficiency, low consumption, low noise and safety, and used widely in the field, such as hospital or hotel laundry soft-mounted with Automatic Development Inverter



WE OFFER SUSTAINABLE SOLUTIONS IN LAUNDRY FOR CLEANROOMS

The full range of LAVATRICE washers non extractor have been designed with durability, ergonomics and low maintenance in mind. They are compact and offer significant energy savings without ever forgetting that cleanliness is the most important point. They are therefore manufactured with special materials suitable for clean rooms, such as 304L stainless steel, electrically polished barrels and drums.



DETERGENT DOSING OPTION


Your ally with a green soul to ensure optimal washing and rinsing performances. It helps to dose the right amount of detergent for your laundry load, avoiding any waste or potential overdosing.



1. After you have selected the programme and pressed the "Start" button, the Dosing Aid supply with manual or dispenser pump (optional).



2. Run the program by pressing "Start". The drum rotates with the load of laundry, and then after a few seconds, enters the recommended amount of detergent in ml.



3. Pour the detergent quantity indicated on setting into the detergent dispenser and press "Start" to start the wash cycle.

| Item | Model | LC - 20S | LC - 30S | LC - 40S | LC - 50S | LC - 80S |
|-----------------|---------|----------|----------|----------|----------|----------|
| Drum capacity | kg | 20 | 30 | 40 | 50 | 80 |
| Drum diameter | mm | 400 | 500 | 600 | 906 | 1070 |
| Drum depth | mm | 800 | 800 | 800 | 500 | 600 |
| Washing speed | rpm | 35 | 35 | 35 | 35 | 35 |
| Chlotes time | minutes | 30 - 40 | 30 - 40 | 30 - 40 | 30 - 40 | 30 - 40 |
| Drain pipe size | inch | 1.5 | 1.5 | 2.0 | 3 | 3 |
| Motor power | kw/hp | 1.5/2.0 | 2.2/3.0 | 3.0/4.0 | 4.0/5.5 | 5.5/7.5 |
| Power supply | v/p/hz | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 |
| Drum volume | liter | 200 | 300 | 400 | 500 | 800 |
| Width | mm | 1500 | 1500 | 1500 | 1700 | 1900 |
| Depth | mm | 1000 | 1000 | 1000 | 1100 | 1800 |
| Height | mm | 1300 | 1400 | 1500 | 1700 | 1800 |
| Weight | kg | 250 | 350 | 450 | 550 | 850 |

FEATURES

1. Stainless steel 304 inner and outer drums, protect fabrics from getting rusty.
2. Strong corrosion resistance.
3. Adopt famous brand motor & parts to ensure stable performance.
4. Analog control programs. temperature & washing time adjustable.
5. Seal makes no leakage of both ends of spindle.
6. Easy installation and maintenance. new generation, Suitable for washing various fabric and cloth.
7. Ideal choice for laundry, hotel ,troops ,jeans or dyeing factory.



Professional reliability in compact dimensions

Discover the New -Line Collection

Sturdy, reliable and user-friendly, the NEW-LINE washing machines, dryers, ironers and steam finishing pressing which makes them the perfect solution for professional laundries, hospitals, hotels, camp sites and wherever the laundry area needs to be shared.

EASY TO CLEAN

The drum lifters can be removed, making cleaning easier. Especially in case of mop treatment, removable lifters are a great help in drum cleaning.

www.lavatrice.id





HE SERIES INDUSTRIAL HYDRO EXTRACTOR (ADi Technology)

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.



| Item | Model | LE-20S | LE-40S | LE-60S |
|-----------------|---------|----------|----------|----------|
| Drum capacity | kg | 20 | 40 | 60 |
| Drum diameter | mm | 600 | 700 | 800 |
| Drum height | mm | 300 | 350 | 400 |
| Rotate speed | rpm | 1000 | 1000 | 1000 |
| Chlotes time | minutes | 15 - 30 | 15 - 30 | 15 - 30 |
| Drain pipe size | inch | 1.5 | 1.5 | 1.5 |
| Motor power | kw/hp | 1.5/2.0 | 2.2/3.0 | 4.0/5.5 |
| Power supply | v/p/hz | 380/3/50 | 380/3/50 | 380/3/50 |
| Width | mm | 1200 | 1300 | 1400 |
| Depth | mm | 1200 | 1300 | 1400 |
| Height | mm | 650 | 700 | 800 |
| Weight | kg | 300 | 500 | 800 |

FEATURES SS751-754 series extracting machine :

1. Extracting machine, Industrial extracting machine, Commercial extracting Machine, Hydro extractor, Dewatering machine, Industrial dewatering Machine, Automatic extracting machine, Hydro extracting machine.
2. Three-legs suspended structure consists of the following parts: Triangle basement, casting steel legs, drum, outer body, motor and brake device in the machine which can be stopped in short time.
3. Independent three legs suspended instruction can avoid shock caused by unbalanced loading.
4. Equipped with special brake arms which is durable and reliable make the machine safer.
5. The motor will start with slow speed then to the required speed gradually. Then drum will be driven by triangle rubber belt, running smoothly and synchronously.
6. Stainless steel inner drum and body.
7. High efficiency, easy operation, low noise and safety, and used widely in the field, such as hotel, restaurant, laundry house, water washing plant, and laundry equipment for garment, fabric, apparel.
8. The drum size is from 500 mm to 1500 mm and its capacity is from 25kg to 220kg.
9. CE and ISO9001 certificates.
10. Packing: With wooden box



 **LAVATRICE®**
MAKE COMFORT YOUR LAUNDRY BUSINESS



LD SERIES TUMBLE INDUSTRIAL SMALL MEDIUM DRYER (ADi Technology)

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.



The ideal solution for all industrial activities that need professional drying results and high productivity

PERFECT DRYING RESULTS

Residual Moisture Control

The humidity control programmes stop automatically when the set residual level is reached. This allows for saving time and prevent damages to fabrics due to incorrect setting by the operator.

Reversing Drum

Thanks to the reversing rotating function the drying results are uniform even with large loads.

TOTAL LINEN CARE

Multi-step Heating System

The set temperatures for the heating and cooling phases are reached through different temperature steps. This system prevents damages to fabrics due to sudden changes in temperature.

No-Wrinkle Function

At the end of the cycle, the drum keeps on rotating and reversing, to prevent the wrinkles creation. This will also facilitate ironing.



SAFETY

A safety device stops the tumble dryer if the door is opened while the dryer is working.

ERGONOMICS

The door width, its opening to 180° and its position make loading of the linen easier.

LOW NOISE

The dryers have been studied to maintain a noise level below 70dB (A) thanks to the drying chamber thermally and acoustically insulated with rock wool.



| Item | Model | LD - 20S | LD - 30S | LD - 40S | LD - 65S | LD - 120S |
|-----------------------|---------|--------------------|--------------------|-----------|-----------|------------|
| Drum capacity | kg | 20 | 30 | 40 | 65 | 120 |
| Drum dimension | mm | φ800x600 | φ900x700 | φ1060x840 | φ1225x960 | φ1470x1180 |
| Drum rotation | rpm | 35 | 35 | 32 | 30 | 30 |
| Motor power | kw | 0,75 | 0,75 | 1,1 | 1,5 | 4 |
| Fan power | kw | 0,75 | 0,75 | 1,1 | 1,5 | 2,2x2 |
| Power supply | v/p/hz | 230/380/1/3/5 0 | 230/380/1/3/5 0 | 380/3/50 | 380/3/50 | 380/3/50 |
| Dry time | minutes | 40 - 60 | 40 - 60 | 40 - 60 | 40 - 60 | 40 - 60 |
| Gas Consumption | kg | 3,5 | 3,5 | 4,5 | 4,5 | 4,5 |
| Steam pressure | mpa | 0,5 - 0,6 | 0,5 - 0,6 | 0,5 - 0,6 | 0,5 - 0,6 | 0,5 - 0,6 |
| Electric heater power | kw | 16 | 16 | 27 | 36 | 36 |
| Exhaust flow rate | cfm | 750 | 750 | 750 | 750 | 750 |
| Width | mm | 800 | 1130 | 1160 | 1200 | 1650 |
| Depth | mm | 1000 | 1100 | 1200 | 1200 | 1900 |
| Height | mm | 1200 | 1750 | 1970 | 1970 | 2470 |
| Weight | kg | 430 | 460 | 520 | 630 | 800 |

FEATURES

1. Fast drying performance with Auto Reversing (ADi Technology).
2. Analog control. temperature control and over-temperature protection device installed.
3. Durable stainless steel drum , prevent the fabric from pollution, anti-corrosion.
4. Concentrated airflow and sealed drum ensure maximum air utilization and energy savings to improve drying efficiency.
5. Heat-exchanger adopt seamless pipe to make higher thermal efficiency.
6. Advanced structure, fewer moving parts mean fewer maintenance problems and less wear.
7. Heating: electrical, steam, electrical and steam, gas/LPG.
8. Easy accessibility to the vital parts, easy service, quick replacement of the belt.
9. Large door, easy loading and unloading, opens 180°, option: left or right opening.
10. Its capacity 20, 40 and 65 Kg.
11. Standard quality product.

SUPREME CARE • AUTOMATIC TUMBLE DRYER

EASY TO USE AND PROGRAMMING

To select and start a program, the user just needs to scroll through the program and press the start button. During program execution, the screen displays information that refers to the currently running process.



TOTAL SAFETY

Emergency Stop Button

The machines are equipped with an emergency stop button that switches off the machine when pressed. This button puts the washer in electric safe condition for the user whenever a possible malfunction occurs.



Body & Drum Stainless

Professional Ironing

LI SERIES INDUSTRIAL

Flatwork Ironers

Great Amazing Results in standard
length linen laundry

New functions and lower consumption make the New Machine
Collection an ideal and efficient laundry solution for hotel and
hospital laundry businesses..



LI SERIES INDUSTRIAL FLATWORK IRONER (ADi Technology)

5TH SENSE Technology The best
performance without any waste

The 5THSENSE intelligent sensors adapt the resources according to the weight and type of load, eliminating up to 50%* of the required energy, water and time.



| Item | Model | LI - 1160 | LI - 1200 | LI - 1250 | LI - 1300 | LI - 1330 |
|-------------------|---------|-----------|-----------|-----------|-----------|-----------|
| Ironing range | mm | 1600 | 2000 | 2500 | 3000 | 3300 |
| Ironing roll | mm | φ300x1600 | φ500x2000 | φ500x2500 | φ500x3000 | φ800x3300 |
| Ironing speed | mtr/min | 1-6 | 1-6 | 1-6 | 1-6 | 1-12 |
| Max Temperature | °C | 150 | 150 | 150 | 150 | 150 |
| Motor power | kw/hp | 1.1/1.5 | 1.1/1.5 | 1.1/2.0 | 2.2/2.0 | 3.0/4.0 |
| Electric heater | kw | 9 | 18 | 18 | 20 | 20 |
| Power supply | v/p/hz | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 | 380/3/50 |
| Steam consumption | kg/h | | 70 | 75 | 80 | 80 |
| Gas Consumption | kg/h | 3.0 | 3,5 | 4,5 | 5,5 | 5,5 |
| Steam presure | mpa | 0,4 - 0,6 | 0,4 - 0,6 | 0,4 - 0,6 | 0,4 - 0,6 | 0,4 - 0,6 |
| Width | mm | 2460 | 2860 | 3500 | 4000 | 4200 |
| Depth | mm | 700 | 900 | 900 | 900 | 1400 |
| Height | mm | 1260 | 1260 | 1260 | 1260 | 1260 |
| Weight | kg | 500 | 600 | 1000 | 1500 | 2500 |

FEATURES

1. Simple chain drive mechanism with single motor.
2. Heating roll made of high quality stainless steel.
3. Large contact area of 150 degree to maximum heating exchange.
4. Variable speed frequency inverter control, users can choose the suitable speed for different textiles.
5. Gradual speed increment between rolls to improve ironing quality by stretching effect.
6. Equipped with finger protection bar.
7. Simple control with on/off button.
8. Heating roll and guide shaft drive simultaneously.
9. Float type steam trap reduces steam consumption.

LAVATRICE flatwork ironers guarantee extraordinary performance and high productivity

EFFICIENCY FOR GREAT IRONING RESULTS

Ironing Pressure Control

The flat ironers are equipped with an advanced system capable of controlling the ironing pressure and customising the programme according to the fabric, to ensure flawless results. Moreover, the torsion bar helps to maintain the chest pressure uniform along the entire roller length for perfect ironing.

Power Control Function

Thanks to this function, the operator can choose whether to operate at low speed or at the highest level, according to the power available. It is possible to check the energy consumption on the display.

Auto-Adjustment of the Speed

The flatwork ironers are also equipped with an automatic regulation device, to adjust the roller speed according to the ironing temperature. Since linen may have different levels of moisture, the speed is automatically increased or decreased according to the temperature of the roller.

SAFETY AND ERGONOMICS

LAVATRICE flatwork ironers have several devices, specially designed to make laundry work easier, faster and safer.

Adjustable Table

The introduction table can be adjusted to make the user's position more comfortable.

Psafety Selenoid

The safety valve will keep the possibility of excess gas pressure and fire when the engine is running.

Hand Safety Bar

The hand safety bar prevents the accidental slipping of a limb or stretching of a textile behind the roller.

Emergency Stop Button

In case of danger, the emergency stop button cuts off the power immediately.

ADVANCED TECHNOLOGY

Very easy setting program for unlimited ironing, which can vary according to temperature, speed and pressure.

Programs can be modified even during the customized cycle for each program.

ENERGY SAVING

From the sensor system it is possible to activate the temperature stabilization function in the tube, which can save fuel and electrical energy, the heating system stops but the flatwork iron continues to work with the stored heat energy. When the temperature drops below 80°C, the flatwork iron's LPG supply automatically turns on.

This function has two advantages:

it extends the life of the roller cover

save energy due to the use of stored heat energy

EASY SERVICE

The control panel keeps records of time, temperature and speed.

In addition, it is possible to read the alarm history and troubleshoot, making the technician's job easier when the fuel runs out.





Industrial Finishing Steam Pressing

Superior sturdiness,
maximum safety and
Excellent Performance

A large array of laundry solutions suitable for all industrial activities.




Utility Press Machine Built In Boiler

Model YC-118, with 9Kw electric boiler
Motor 0.55Kw, 3Phase+N 380V 50Hz.
Steam Pressure 0.4-0.7Mpa
Dimension 1500(L)×1400(W)×1400(H)mm
Net Weight 350 Kg



Moshroom Press Machine Built In Boiler

Model QYC-206, with 9Kw electric boiler
Motor 0.55Kw, 3Phase+N 380V 50Hz.
Steam Pressure 0.4-0.7Mpa
Dimension 1400(L)×1400(W)×1300(H)mm
Net Weight 320 Kg

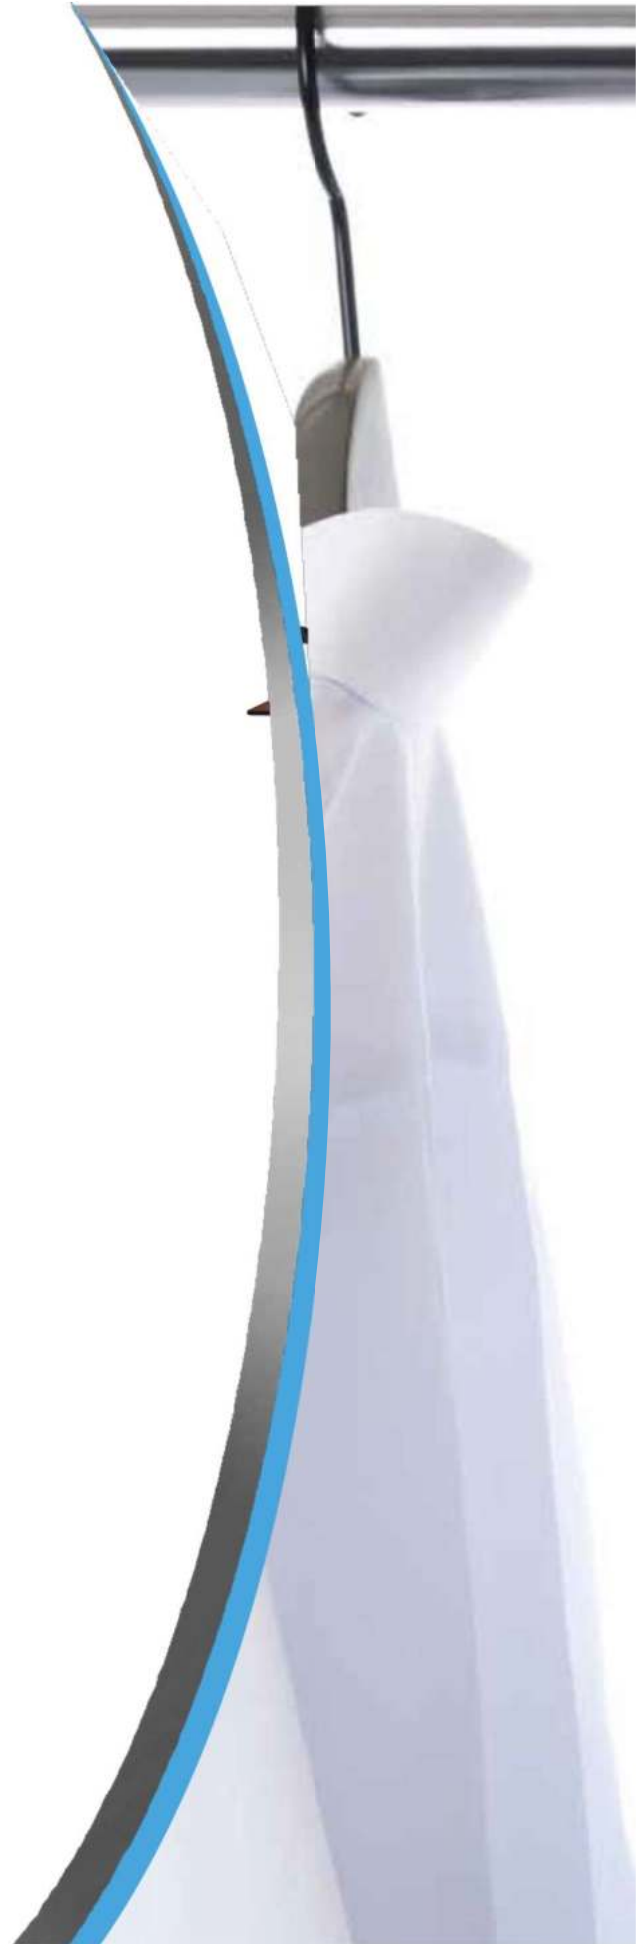



Collar & Cuff Press Machine Built In Boiler

Model QYC-207, with 9Kw electric boiler
Motor 0.55Kw, 3Phase+N 380V 50Hz.
Steam Pressure 0.4-0.7Mpa
Dimension 1400(L)×1400(W)×1300(H)mm
Net Weight 360 Kg



Finishing System (Body Bossom With Boiler)

Model QYC-205, with 9Kw electric boiler Head
Size 1500*500mm (Stainless steel)
Motor 0.55Kw, 3Phase+N 380V 50Hz.
Steam Pressure 0.4-0.7Mpa
Dimension 1400(L)×1400(W)×1300(H)mm
Net Weight 380 Kg



Form Finisher

Model RZ-II, with Steam
Pressure 0.4-0.7 Mpa
Power 0.55 KW, 220, 50 Hz
Dimension
1000(L)×450(W)×1630(H)mm
Net Weight 76 Kg



Chemical Product Recommendation



Made in Indonesia

The Ceo Building 12 level, TB Simatupang No.18 C
Jakarta Selatan - 12430

Lavatrice is a registered trademark of PT. Triglobal Mandiri Indonesia
Nomor : BRM2158A

www.lavatrice.id